





DATA SHEET JEMCO



الکتروموتور ۲۲۰ کیلووات ۱۵۰۰ دور ماشینهای الکتریکی جوبین (جمکو)

Subject: Medium voltage squirrel cage induction motors

				Manufacturer		Jemco	
Motor Type				YJS400-4		Average sound pressure level	
Frame Size		400		Number of poles		4	
Mounting design		IM B3		Type of enclosure		IP55	
EX-Protective syster				safe			
Duty type				S1			
Ambient Temperture				40 C			
Thermal classification				F			
Term motor protection				optional			
Retad output				220KW			
rated voltage				6000V+-5%			
connection				DELTA			
Ferquency		50 HZ.		speed		1488 rpm	
Rated current						26.2 A	
Starting Current		(I _A /I _N)				6.43	
Power Factor		4/4		3/4		1/2	
		0.86					
Efficiency		4/4		3/4		1/2	
		93.8					
Rated torque				(T _N)			
starting torque				(T _s /T _N)=			
Break-down torque				(T _{max} /T _N)=			
Rotor class/material				squirrel cage			
Rotor voltage				Rotor current			
Rotor inertia				100 Kgm2			
cooling method				IC411			
altitude of instalation				1000m			
Additional data and remarks:							
1- permisslbie percentage Voltage imbalance not greater than1%							
2-Cold Starting per Hour(3)							
3- Hot Starting per Hour(2)							
4- Maximum Hot starting Time not more than 60 second							
5- Maximum cold Time not more than 80 second							
Date		Name		Tolerances acc. To		NC.	
Designed							
checked							

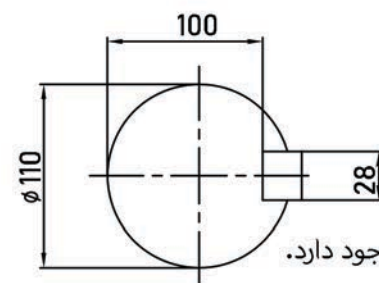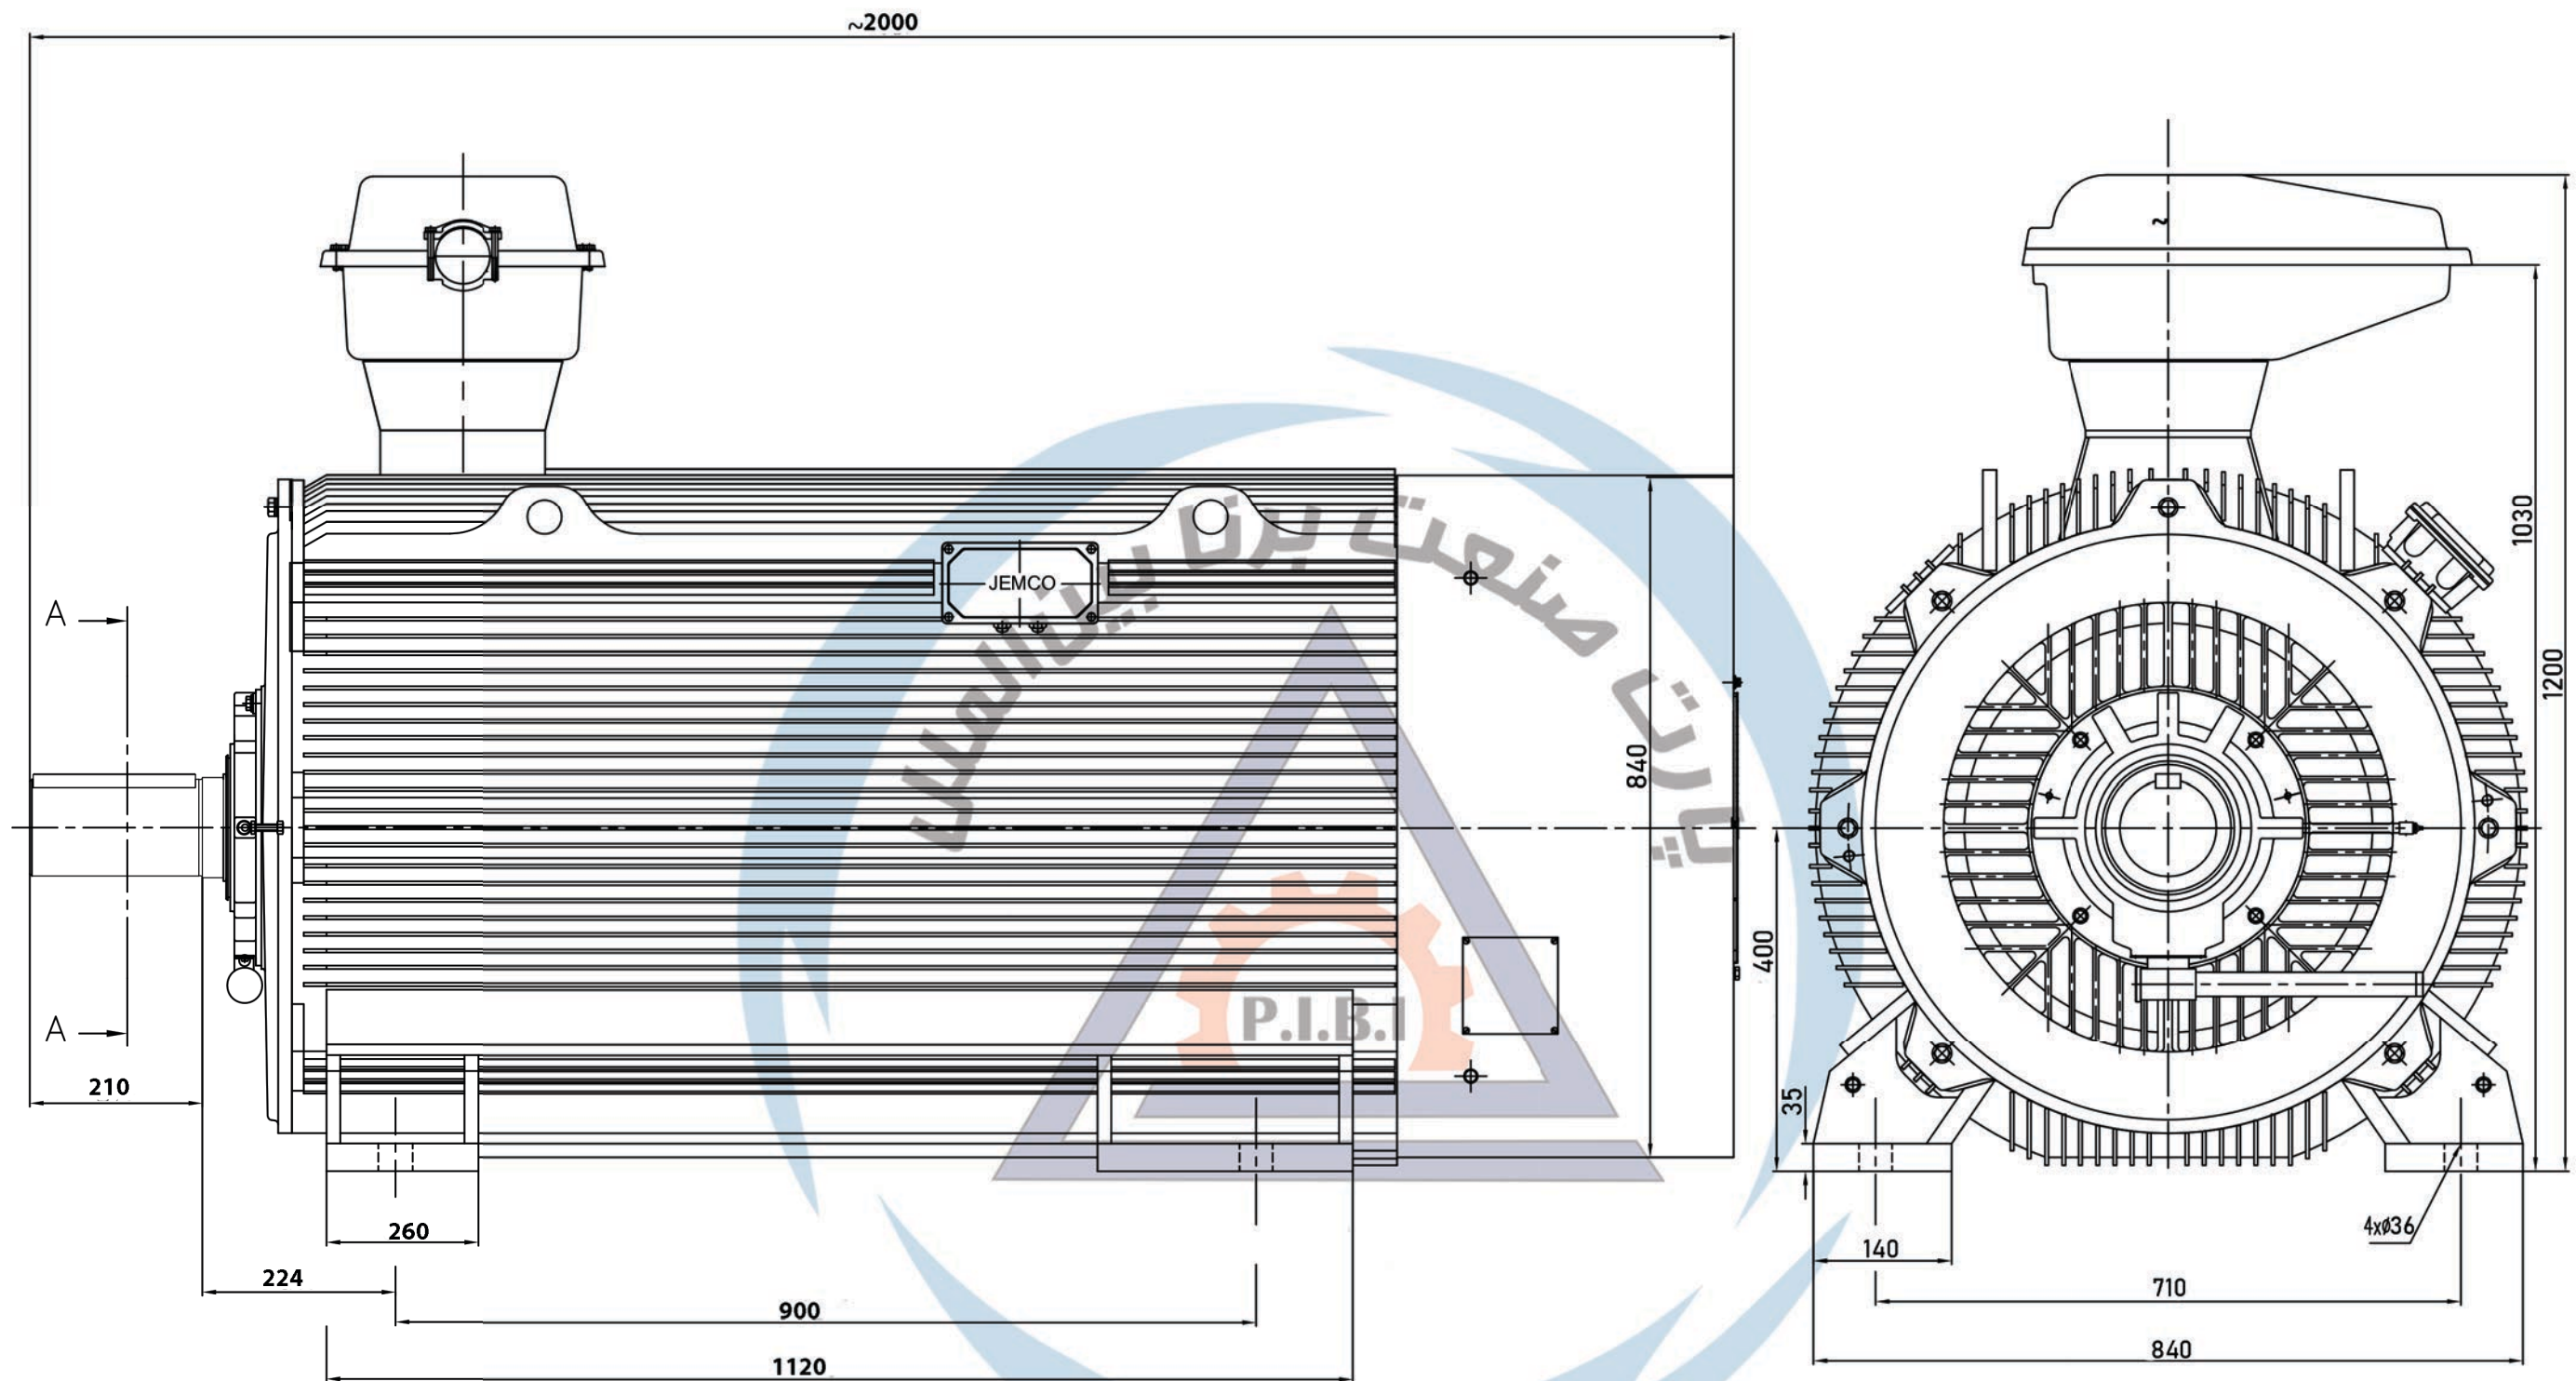

کلیه ابعاد بر حسب میلی متر است
امکان تولید الکتروموتور بر طبق ابعاد مورد نظر مشتری وجود دارد.
سایر ولتاژها نیز قابل طراحی و تولید می باشد.

WWW.PARSTEHRAN.COM

Additional Information.:

Electromotor 220 Kw-6Kv-4Pole

Type Of Construction: IMB3	Drawn			Title:
Protection: IP55	Cooling: IC411	Checked		
		Approved	Engineering Dept.	Outline drawing
		Date	Name	
Sheet: 1/1	Size: A3	Jovain electrical machines Co. (JEMCO) Engineering Dept.		Order No.: YJS 400-4